


CERTIFICATE OF ANALYSIS

Specification
AEROPRO PACK 8 1000 GSM

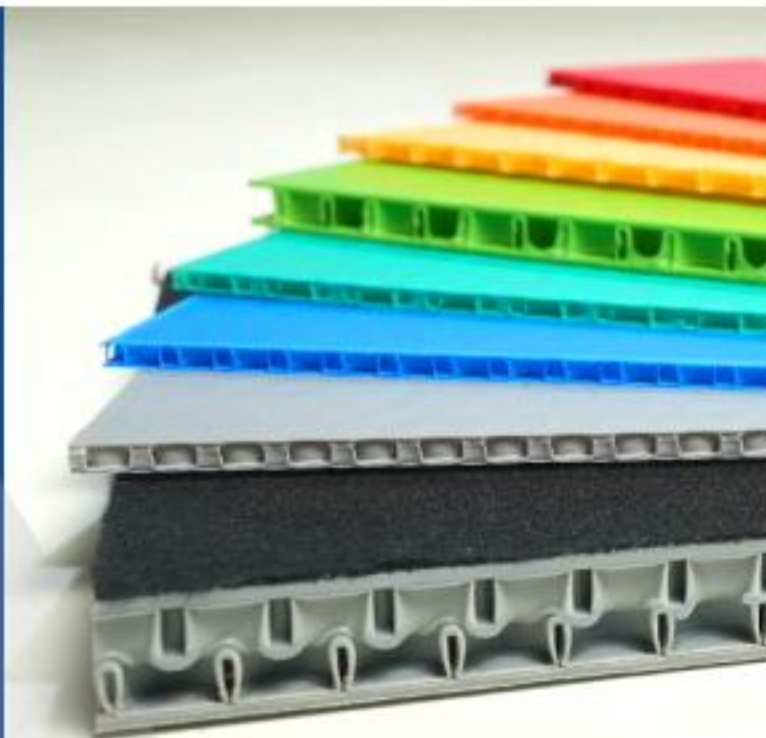

PROPERTY	REFERENCE	UOM	TEST VALUE
Grammage	Aerolam Test Method	g/m2	1000 ± 5%
Thickness	Aerolam Test Method	mm	4.5 ± 3%
Tensile Strength at Yield	ASTMD 638	MPa	6.70
Elongation at Yield	ASTMD 638	%	15.20
ECT	Guidelines of IS 7063 (P-2)	KN/m	8.86
Puncture Resistance	Guidelines of IS 4006	J	12.4
Corona Treatment	ASTMD 2578	Dy/cm	42
Surface Quality	Aerolam Test Method	-	Pass

Checked by

Q A Engineer

Aerolam Decoratives PVT. LTD



CERTIFICATE OF ANALYSIS

Specification
AEROPRO PACK 8 300 GSM



PROPERTY	REFERENCE	UOM	TEST VALUE
Grammage	Aerolam Test Method	g/m2	300 ± 5%
Thickness	Aerolam Test Method	mm	2.4 ± 0.2
Tensile Strength at Yield	ASTMD 638	MPa	2.94
Elongation at Yield	ASTMD 638	%	16.47
Flat Crush Test (Load at 100sq.cm/ Diameter 11.28cm)	Guidelines of APPI T825	MPa MPa	112
Impact Strength	ASTMD 5628	J/m	2.42
Corona Treatment	ASTMD 2578	Dy/cm	42
Surface Quality	Aerolam Test Method	-	Pass

Checked by

Q A Engineer

Aerolam Decoratives PVT. LTD

